


Technical drawing of a corrugated metal roof section. The drawing shows a cross-section of the roof with a corrugated profile. Key dimensions and features include:

- Overall length: 1005.31
- Distance from left edge to first hole: (37.5)
- Distance between holes: 125.66
- Distance from left edge to last hole: 930.3
- Distance from left edge to center of first hole: (62.83)
- Distance from center of first hole to center of last hole: 125.66 Pitch x 7 = 879.62
- Distance from center of last hole to right edge: 12
- Hole pattern: 2 x ϕ 7.70 THRU
- Additional hole pattern: 8 x ϕ 10 THRU, ϕ 15 ∇ 9

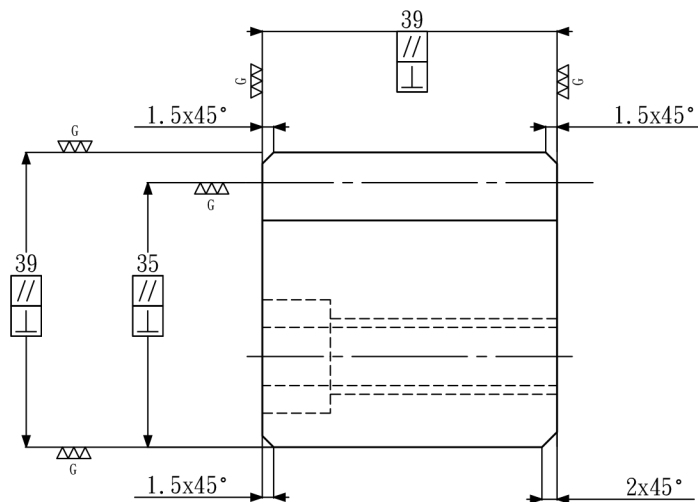

高週波硬度:HRC50°- 55°

高週波硬度:HRC50°- 55°					Total Pitch Error 總齒距累積誤差		GT f/1000≤0.036mm			
除非另有指定,否則毫米為單位 Unless specify,unit is mm 去除毛邊與銳角 DEBUR AND SHARP CUTTING EDGES 表面加工 SURFACE FINISH: 公差 TOLERANCES: 線性 LINEAR: 角度 ANGLE:	高週波Hardness	有 Included	模數Module	4	繪製 DRAWN BY	YUNG	Y Y C 群聚科技（廣東）有限公司 Qunju Technology (Guangdong) Co., Ltd			
	四面研磨Sides Ground	有 Included	齒數Teeth No.	80T	檢查 CHK' D					
	齒研 Teeth Ground	有 Included	壓力角Pressure Angle	20°	核准 APPV' D		圖號 DWG NO: CSTGH04010-DIN6			
	染黑Blackening	無 Not included	右旋角Right Hand Angle	N/A			日期 DATE : 2020. 5. 20			
	精度等級 Precision Grade	DIN 6級 DIN Grade 6	材質Material	S45C			版次 A			
					比例 SCALE 1:2		重量WEIGHT:		圖頁 SHEET 1 OF 1	