
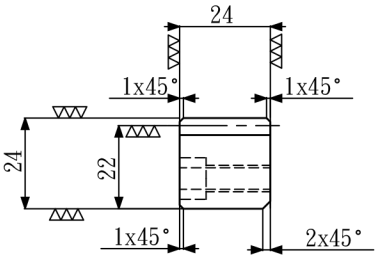


($\nabla \nabla$ = Ra2.4)

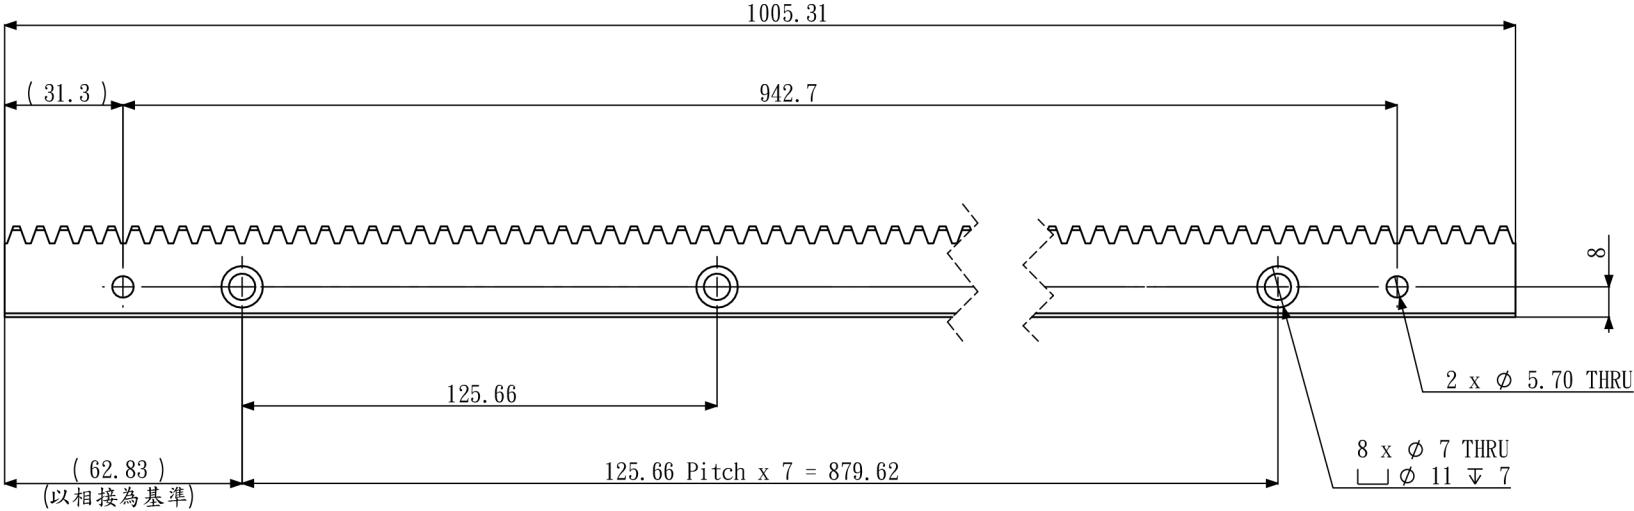

高週波硬度:HRC50°- 55°

Total Pitch Error
總齒距累積誤差

GT f/1000≤0.10mm

除非另有指定, 否則毫米為單位 Unless specify, unit is mm 去除毛邊與銳角 DEBUR AND SHARP CUTTING EDGES 表面加工 SURFACE FINISH: 公差 TOLERANCES: 線性 LINEAR: 角度 ANGLE:	高週波Hardness	有 Included	模數Module	2	繪製 DRAWN BY	YUNG	 群聚科技（廣東）有限公司 Qunju Technology (Guangdong) Co., Ltd	
	四面研磨Sides Ground	無 Not included	齒數Teeth No.	160T	檢查 CHK'D			
	齒研 Teeth Ground	無 Not included	壓力角Pressure Angle	20°	核准 APPV'D		圖號 DWG NO: CSTMH02010-DIN10	
	噴砂 Sandblast	有 Included	右旋角Right Hand Angle	N/A			日期 DATE : 2020. 5. 20	
	精度等級 Precision Grade	DIN 10級 DIN Grade 10	材質Material	S45C			比例 SCALE 1:2	重量WEIGHT: 圖頁 SHEET 1 OF 1